

Brassware



Selector	1:5:0
Modern	1:5:1
Contract	1:5:2
Kitchen	1:5:3

Icon key



Residential



Public Places



Water Savings



Hospitals & Healthcare



Disabled access



Doc M Compliant



Education



Spacesaving






Hotels



Anti-vandal

Modern

Principal Page	Application Symbols	Operation	Lever	Basin Options	Bath Options	Bidet Options	Sink Options	Suitability of supplies	Factory fitted flow regulator*	WRAS approved*	Finish Chromium Plated
Adriana	1:5:1:2 	Quarter turn	Yes	Yes	Yes	Yes	Yes	Balanced/unbalanced	No	No	●
Golf - Design	1:5:1:5 	Quarter turn	Yes	Yes	Yes	Yes	Yes	Balanced/unbalanced	No	No	●
Livia	1:5:1:8 	Quarter turn	Yes	Yes	No	Yes	No	Balanced/unbalanced	No	No	●

* Selected fittings only - see principal page for full details






Contract

Principal Page	Application Symbols	Operation	Lever	Basin Options	Bath Options	Bidet Options	Sink Options	Suitability of supplies	Factory fitted flow regulator*	WRAS approved*	Finish Chromium Plated
Alterna 5412	1:5:2:2 	Screwdown	No	Yes	Yes	No	Yes	Balanced/unbalanced	No	Yes	●
Alterna Quadrant	1:5:2:2 	Quarter turn	Yes	Yes	Yes	No	Yes	Balanced	No	Yes	●
Avon Bib Tap	1:5:2:3 	Self Closing	No	Yes	No	No	No	Balanced/unbalanced	Yes	Yes	●
Avon 21 pillar taps	1:5:2:4 	Self Closing	No	Yes	No	No	No	Balanced/unbalanced	Yes	Yes	●
Avon 21 Mixer	1:5:2:4 	Self Closing	No	Yes	No	No	No	Balanced/unbalanced	Yes	Yes	●
Contour 21	1:5:2:5 	Quarter turn	Yes	Yes	Yes	No	No	Balanced	No	Yes	●
Markwik	1:5:2:8 	Quarter turn	Yes	Yes	No	No	No	Balanced	No	No	●
Markwik 21	1:5:2:13 	Quarter turn	Yes	Yes	No	No	No	Balanced	No	No	●
Nimbus	1:5:2:18 	Screwdown	No	Yes	No	No	No	Balanced/unbalanced	No	Yes	●
Nuastyle	1:5:2:21 	Quarter turn	Yes	Yes	Yes	No	Yes	Balanced/unbalanced	No	Yes	●
Piccolo 21	1:5:2:22 	Quarter turn	Yes	Yes	No	No	No	Balanced	Yes	Yes	●
Sandringham	1:5:2:27 	Self Closing	No	Yes	No	No	No	Balanced/unbalanced	No	No	●
Sandringham 21	1:5:2:28 	Quarter turn	Yes	Yes	Yes	No	Yes	Balanced	Yes	Yes	●
Sandringham SL	1:5:2:35 	Quarter turn	Yes	Yes	Yes	Yes	Yes	Balanced	Yes	Yes	●
Sensorflow 21	1:5:2:38 	Automatic	No	Yes	No	No	No	Pre-mixed Supply	Yes	No	●
Starlite	1:5:2:47 	Screwdown	No	Yes	No	No	No	Balanced/unbalanced	No	No	●
Outlet for washbasins	1:5:2:48 	N/A	N/A	Yes	No	No	No		No	No	●
Mixing valves	1:5:2:49 	N/A	N/A	Yes	Yes	Yes	No	Balanced/unbalanced	N/A	No	●

* Selected fittings only - see principal page for full details

Principal Page	Application Symbols	Operation	Lever	Basin Options	Bath Options	Bidet Options	Sink Options	Suitability of supplies	Factory fitted flow regulator*	WRAS approved*	Finish Chromium Plated
----------------	---------------------	-----------	-------	---------------	--------------	---------------	--------------	-------------------------	--------------------------------	----------------	------------------------

Kitchen

Adriana	1:5:3:2		Quarter Turn	Yes	Yes	Yes	Yes	Yes	Balanced	No	No	●
Golf - Design	1:5:3:3		Quarter Turn	Yes	Yes	No	No	No	Balanced	No	No	●
Livia	1:5:3:4		Quarter Turn	Yes	Yes	Yes	Yes	Yes	Balanced	No	No	●
Sandringham 21	1:5:3:5		Screwdown	Yes	Yes	Yes	Yes	Yes	Balanced/unbalanced	No	No	●
Sandringham SL	1:5:3:9		Quarter Turn	Yes	Yes	Yes	Yes	Yes	HP Balanced	Yes	Yes	●


* Selected fittings only - see principal page for full details

Brassware

Modern

Adriana basin mixer

Single lever basin mixer with an elegant and minimal design. Contemporary and safe, it is equipped with Temperature limit stop, allowing restriction of the handle's movement and thus protection from scalding.

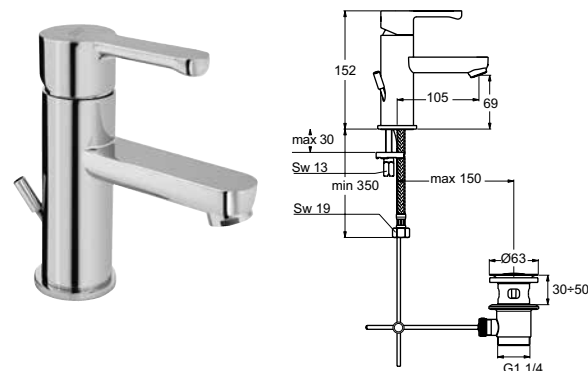

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9780 Adriana single lever one hole basin mixer with 35mm cartridge and metal pop-up waste

Material

Chrome plated Metal

Weight

2.1kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min

Special Notes

Flexible Hoses G3/8". Easy - fix system installation



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9781 Adriana single lever one hole vessel mixer with 35mm cartridge

Material

Chrome plated Metal

Weight

1.3kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min


Special Notes

Flexible Hoses G3/8". Easy - fix system installation



Adriana bidet mixer

Single lever bidet mixer with an elegant and minimal design. Contemporary and safe, it is equipped with Temperature limit stop, allowing restriction of the handle's movement and thus protection from scalding.

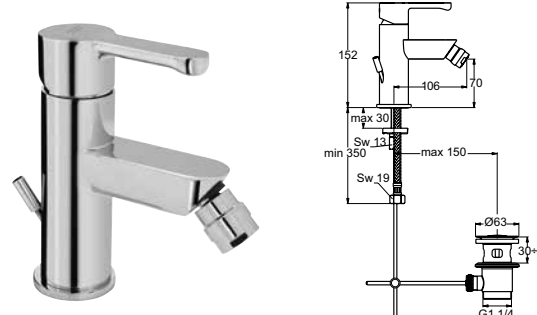

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9782 Adriana single lever one hole bidet mixer with 35mm cartridge and metal pop-up waste

Material

Chrome plated Metal

Weight

2.1kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min

Special Notes

Flexible Hoses G3/8". Easy - fix system installation



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Click cartridge

Temperature limit stop

Illustrated

B9784 Adriana single lever exposed bath shower mixer with 47mm Click cartridge and no kit

Material

Chrome plated Metal

Weight

2.4kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min for the spout

F960921AA None-Return valve and flow limiter 8l/min

Special Notes


S - connectors with noise reducers

For use with Armaglide 2 shower accessories



Adriana vessel mixer

Single lever vessel mixer with an elegant and minimal design. Contemporary and safe, it is equipped with Temperature limit stop, allowing restriction of the handle's movement and thus protection from scalding.

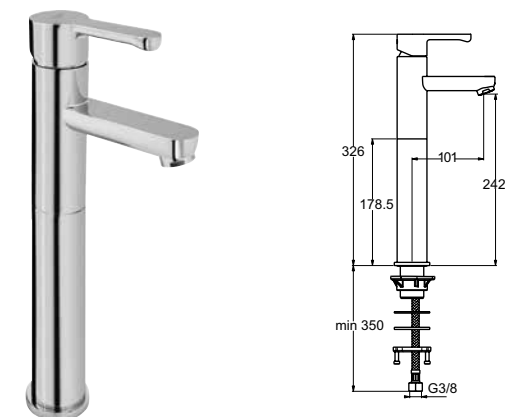

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9781 Adriana single lever one hole vessel mixer with 35mm cartridge

Material

Chrome plated Metal

Weight

1.3kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min


Special Notes

Flexible Hoses G3/8". Easy - fix system installation



Adriana exposed bath shower mixer

Single lever exposed bath shower mixer with an elegant and minimal design. Contemporary and safe, it features Click cartridge which offers a limit on water flow by 50%. The cartridge also incorporates a safety device restricting movement of the handle on the hot side.

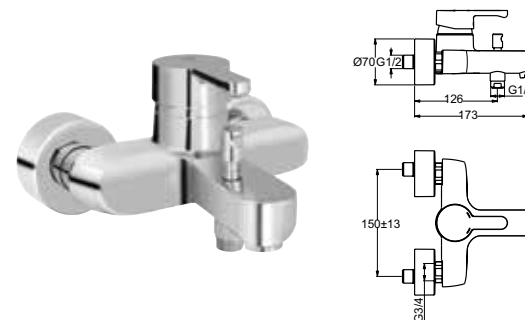

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Click cartridge

Temperature limit stop

Illustrated

B9784 Adriana single lever exposed bath shower mixer with 47mm Click cartridge and no kit

Material

Chrome plated Metal

Weight

2.4kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min for the spout

F960921AA None-Return valve and flow limiter 8l/min

Special Notes

S - connectors with noise reducers

For use with Armaglide 2 shower accessories



Adriana

exposed shower mixer

Single lever exposed shower mixer with an elegant and minimal design. Contemporary and safe, it features Click cartridge, which offers a limit on water flow by 50%. The cartridge also incorporates a safety device restricting movement to the handle on the hot side.



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disk

Click cartridge

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9783 Adriana single lever exposed shower mixer with 47mm Click cartridge and no kit

Material

Chrome plated Metal

Weight

2.1kg

Colour/Finish

Chromium plated (AA)



Options

A960453NU None - Return valve and flow limiter 8l/min

Special Notes

S - connectors with noise reducers.

For use with Armaglide 2 shower accessories




1 : 5 : 1 : 4

Brassware

Golf - Design

basin mixer

Single lever basin mixer that follows a "soft-edge" design concept, giving it smooth, harmonised, friendly form. Ecological, economical & safe, it is equipped with Click Technology, which helps to easily control, monitor and reduce water consumption. The Temperature limit stop allows the user to have the maximum water heat level of his personal choice, reducing risk of scalding.



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Suitable for closed fist operation

Illustrated

B9773 Golf - Design single lever one hole basin mixer with 47mm Click cartridge and metal pop-up waste

Material

Chrome plated Metal

Weight

2.0kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min

Special Notes


Flexible Hoses G3/8". Easy - fix system installation



Golf - Design

bidet mixer

Single lever bidet mixer that follows a "soft-edge" design concept, giving it smooth, harmonised, friendly form. Ecological, economical & safe, it is equipped with Click Technology, which helps to easily control, monitor and reduce water consumption. The Temperature limit stop allows the user to have the maximum water heat level of his personal choice, reducing risk of scalding.

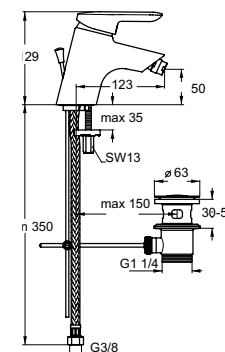

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Suitable for closed fist operation

Illustrated

B9774 Golf - Design single lever one hole bidet mixer with 47mm Click cartridge and metal pop-up waste

Material

Chrome plated Metal

Weight

2.0kg

Colour/Finish

Chromium plated (AA)

Options

A963369AA Aerator M18X1 5l/min

Special Notes

Flexible Hoses G3/8". Easy - fix system installation




1 : 5 : 1 : 5

Golf - Design

exposed bath shower mixer

Single lever exposed bath shower mixer that follows a "soft-edge" design concept, giving it smooth, harmonised, friendly form. Ecological, economical & safe, it features Click cartridge which offers a limit on water flow by 50%. The cartridge also incorporates a safety device, restricting movement of the handle on the hot side.

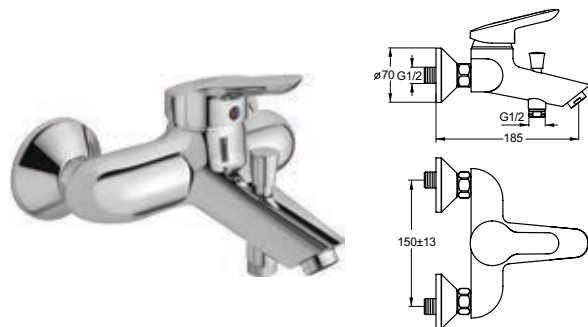

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Illustrated

B9776 Golf - Design single lever exposed bath shower mixer with 47mm Click cartridge and no kit

Material

Chrome plated Metal

Weight

3.4kg

Colour/Finish

Chromium plated (AA)

Options

B960852AA Aerator cascade PCA M24X1 5l/min for the spout

F960921AA None - Return valve and flow limiter 8l/min

Special Notes

S - connectors with noise reducers

For use with Armaglide 2 shower accessories



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Suitable for closed fist operation

Illustrated

B9778 Golf - Design single lever built-in bath shower kit 2, faceplates and handles. For combination with kit 1 A2650NU

A2650 Built-in kit 1 with 47mm Click cartridge

Material

Chrome plated Metal

Weight

0.7kg

Colour/Finish

Chromium plated (AA)

Special Notes

For use with Armaglide 2 shower accessories



Golf - Design

exposed shower mixer

Single lever exposed shower mixer that follows a "soft-edge" design concept, giving it smooth, harmonised, friendly form. Ecological, economical & safe, it features Click cartridge which offers a limit on water flow by 50%. The cartridge also incorporates a safety device, restricting movement of the handle on the hot side.



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Click cartridge

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9775 Golf - Design single lever exposed shower mixer with 47mm Click cartridge and no kit

Material

Chrome plated Metal

Weight

1.9kg

Colour/Finish

Chromium plated (AA)

Options

A960453NU None - Return valve and flow limiter 8l/min

Special Notes

S - connectors with noise reducers

For use with Armaglide 2 shower accessories



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Click cartridge

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9779 Golf - Design single lever built-in shower kit 2, faceplates and handles. For combination with kit 1 A2650NU

A2650 Built-in kit 1 with 47mm Click cartridge

Material

Chrome plated Metal

Weight

0.6kg

Colour/Finish

Chromium plated (AA)

Special Notes


For use with Armaglide 2 shower accessories



Golf - Design

built-in bath shower mixer with round faceplate

Single lever built-in bath shower mixer that follows a "soft-edge" design concept, giving it smooth, harmonised, friendly form. Ecological, economical & safe, it features Click cartridge which offers a limit on water flow by 50%. The cartridge also incorporates a safety device, restricting movement of the handle on the hot side.

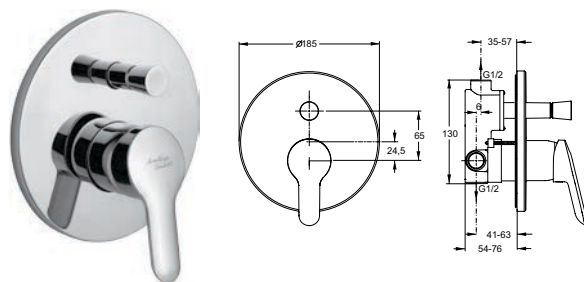

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Suitable for closed fist operation

Illustrated

B9778 Golf - Design single lever built-in bath shower kit 2, faceplates and handles. For combination with kit 1 A2650NU

A2650 Built-in kit 1 with 47mm Click cartridge

Material

Chrome plated Metal

Weight

0.7kg

Colour/Finish

Chromium plated (AA)

Special Notes


For use with Armaglide 2 shower accessories



Golf - Design

built-in shower mixer with round faceplate

Single lever built-in bath shower mixer that follows a "soft-edge" design concept, giving it smooth, harmonised, friendly form. Ecological, economical & safe, it features Click cartridge which offers a limit on water flow by 50%. The cartridge also incorporates a safety device, restricting movement of the handle on the hot side.

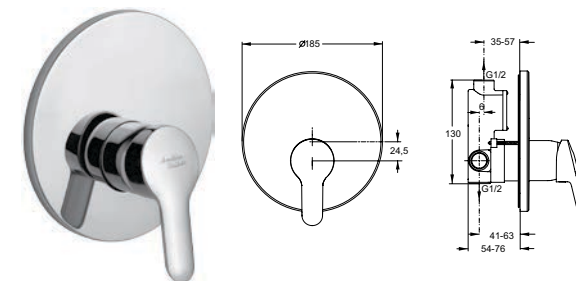

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Click cartridge

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9779 Golf - Design single lever built-in shower kit 2, faceplates and handles. For combination with kit 1 A2650NU

A2650 Built-in kit 1 with 47mm Click cartridge

Material

Chrome plated Metal

Weight

0.6kg

Colour/Finish

Chromium plated (AA)

Special Notes


For use with Armaglide 2 shower accessories



Livia

basin mixer

Single lever basin mixer for a contemporary styling concept. Eco friendly and safe thanks to Click Technology and Temperature limit stop, this Livia mixer facilitates the user to reduce water consumption as well as the risk of scalding.

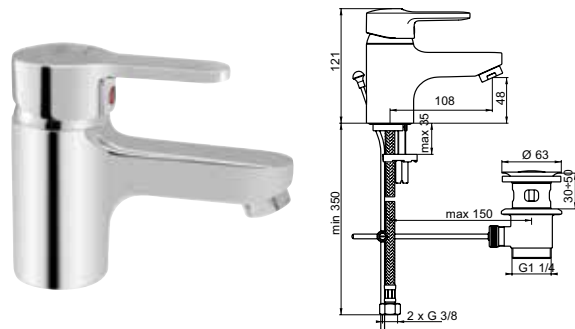

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Suitable for closed fist operation

Illustrated

B9767 Livia single lever one hole basin mixer with 40mm Click cartridge and metal pop-up waste

Material

Chrome plated Metal

Weight

1.9kg

Colour/Finish

Chromium plated (AA)

Options

B960754AA Aerator 5l/min

Special Notes

Flexible Hoses G3/8". Easy - fix system installation



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Suitable for closed fist operation

Illustrated

B9768 Livia single lever one hole bidet mixer with 40mm Click cartridge and metal pop-up waste

Material

Chrome plated Metal

Weight

1.9kg

Colour/Finish

Chromium plated (AA)

Options

A963369AA Aerator M18X1 5l/min

Special Notes

Flexible Hoses G3/8". Easy - fix system installation



Livia

exposed bath shower mixer

Single lever exposed bath shower mixer for a contemporary styling concept. Eco-friendly and safe thanks to Click Technology and Temperature limit stop, this Livia mixer facilitates the user to reduce water consumption as well as the risk of scalding.



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Temperature limit stop

Click Cartridge

Illustrated

B9770 Livia single lever exposed bath shower mixer with 40mm Click cartridge and no kit

Material

Chrome plated Metal

Weight

1.8kg

Colour/Finish

Chromium plated (AA)

Options


B960754AA Aerator regulated 5l/min for the spout

F960921AA None -Return valve and flow limiter 8l/min

Special Notes

S - connectors

For use with Armaglide 2 shower accessories

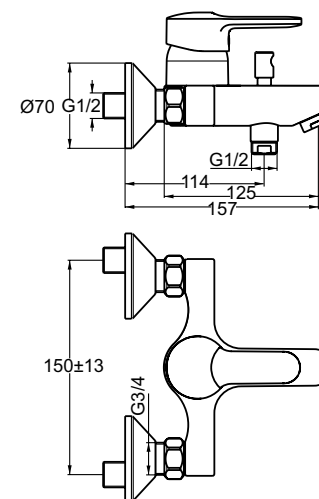

Showers

Livia

exposed shower mixer

Single lever exposed shower mixer for a contemporary styling concept. Eco-friendly and safe thanks to Click Technology and Temperature limit stop, this Livia mixer facilitates the user to reduce water consumption as well as the risk of scalding.



ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disk

Click cartridge

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9769 Livia single lever exposed shower mixer with 40mm Click cartridge and no kit

Material

Chrome plated Metal

Weight

1.5kg

Colour/Finish

Chromium plated (AA)


Options

A960453NU None - Return valve and flow limiter 8l/min

Special Notes

S - connectors.

For use with Armaglide 2 shower accessories

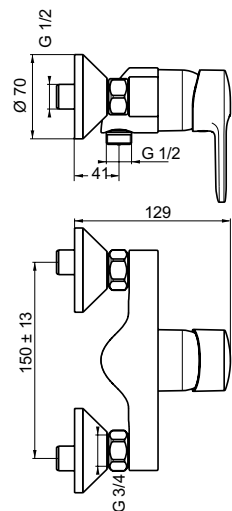

1 : 5 : 1 : 10

1 : 5 : 2 : 1

Alterna

5412 taps

A range of traditional style pillar taps incorporating valve covers for easy cleaning. Suitable for balanced and unbalanced high or low pressure water systems.



ARMITAGE SHANKS

Domestic and commercial use

Chrome plated

Shown with concealed mounts

Illustrated

S7160 Alterna 5412 1/2" bib taps dual Hot and Cold indices

S8336 Bib tap wall mounts 1/2" for concealed plumbing (pair)

Material

Chrome Plated Metal

Weight

Bib taps 1.8kg

Wall mounts 0.8kg

Colour/Finish

Chromium plated (AA)

Special notes

Shown with S8336AA concealed wall mounts. Unregulated flow rate 12 litres per minute at 0.1 bar



ARMITAGE SHANKS

Domestic and commercial use

Quarter turn ceramic disc

operation

Illustrated

S7190 Alterna Quadrant 1/2" quarter turn bib taps with ceramic discs and lever handles

S8336 Bib tap wall mounts 1/2" for concealed plumbing (pair)

Material

Chrome Plated Metal

Weight

Bib taps 1.0kg

Wall mounts 0.8kg

Colour/Finish

Chromium plated (AA)

Special notes

Unregulated flow rate 9 litres per minute at 0.1 bar



Avon

self closing bib tap

Self closing all brass bib tap for water economy. Run time delay is adjustable, suitable for high or low pressure systems.



ARMITAGE SHANKS

Self closing

Anti vandal

Wall mounted

Suitable for closed fist operation

Illustrated

S7241 Avon bib tap, non concussive self closing

Material

Chrome Plated Metal

Weight


2.4kg

Colour/Finish

Chromium plated (AA)

Special notes

Inlet screwed 1/2in BSP male, coned for 15mm copper. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Regulated to 5 litres per minute maximum. Alternative low pressure outlet option supplied




Brassware

Avon 21

self closing pillar taps

Self closing pillar taps avoid wasting water and energy.



ARMITAGE SHANKS

Commercial use
Water and energy saving
DDA compliant

Illustrated

B8267 Avon 21 washbasin inclined pillar taps (pair) with dual Hot and Cold indices per tap, self closing push button non concussive, water saving anti-vandal nozzle regulated to 5 litres per minute maximum. Alternative low pressure outlet option supplied

Material

Chrome Plated Metal

Weight

2.3kg

Special notes

Inlets screwed 1/2in BSP male. Alternative low pressure outlet option supplied. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Regulated flow rate 4.7 litres per minute. Unregulated flow rate 5 litres per minute at 0.1 bar



ARMITAGE SHANKS

Commercial use
Water and energy saving
Self closing

Illustrated

B8263 Avon 21 washbasin mixer 1 hole, self closing push button, variable temperature control with 15mm female connector flexible hoses on inlets

Material

Chrome Plated Metal

Weight

2.3kg

Colour/Finish

Chromium plated (AA)

Options

B8861 Avon 21 washbasin mixer 1 hole, self closing push button, variable temperature with copper tube inlets. Flow rate with fitted regulator 4.7 litres per minute. Unregulated flow rate 5 litres per minute at 0.1 bar.



Brassware

Contour 21

single control mixer

A single lever control wall mounted washbasin mixer. The valve incorporates a ceramic disc cartridge and is suitable for balanced or unbalanced low or high pressure systems. The outlet nozzle is supplied with alternative aerator or flow straightener insert.



ARMITAGE SHANKS

Commercial application
Ceramic disc cartridge
Suitable for closed fist operation
Single sequential control
15cm and 23cm spout options

Illustrated

S7422 Contour 2 washbasin mixer wall mounted single control concealed, ceramic disc operation, 150mm projection spout with alternative aerator or flow straightener outlet, rigid copper inlet tails integral combined filter and regulating valves

Material

Chrome Plated Metal

Weight

3.0kg

Colour/Finish


Chromium plated (AA)

Options

S7423 Contour 2 washbasin mixer wall mounted single control concealed, quarter turn ceramic disc operation, 230mm projection spout with alternative aerator or flow straightener outlet, flexible inlet tails integral combined filter and regulating valves

Special notes

Minimum inlet pressure 0.3 bar - 0.2 bar if flow straightener is used. Maximum inlet pressure 5.0 bar. The mixer will operate on unbalanced supplies within the range above provided the flow is controlled using inlet regulators supplied. The mixer incorporates a single flow body. Inlet tails with 15mm connections for 15mm copper



Avon 21

self closing mixer

Self closing taps avoid wasting water and energy with maximum 4.7 litres per minute flow. Includes additional water saving anti-vandal outlet nozzle.



Armitage
Shanks

1 : 5 : 2 : 4



1 : 5 : 2 : 5

Armitage
Shanks


Contract

Brassware

Contour 21

thermostatic sequential basin mixer

A range of compact water saving vandal resistant lever operated brassware. Factory fitted laminar flow with anti vandal outlet. 5 litres per minute Eco flow regulator.

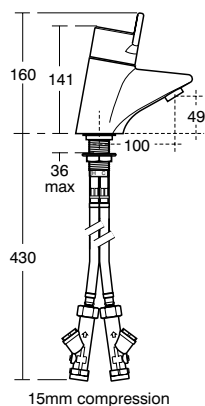

A4169

A4131



ARMITAGE SHANKS

Commercial use

Anti-vandal laminar flow outlet

Copper or flexible tails

DDA compliant

Water saving

Illustrated

A4131 Contour 21 washbasin mixer thermostatic 1 hole, single sequential long lever, flexible tails

Material

Chrome Plated Metal

Weight

2.7kg

Colour/Finish

Chromium plated (AA)

Options

A4169 Contour 21 washbasin mixer thermostatic 1 hole, single sequential long lever, copper tails. Includes 2 litres per minute Eco spring outlet.

Special notes


Suitable for use with handrinse basins in public areas and Doc M. Satisfies DDA requirements. Meets the requirements laid out in HTM 64, HTM 04. Single easy use lever operates on/off and temperature control. Eliminates the need for premixed water. Suitable for high and low pressure systems. To ensure system hygiene and user safety the water flow always commences from cold. Traditional backnut fixing for added security. Fits into a standard pillar tap hole. Flow rate stays constant even when temperature setting is changed (providing supply pressure is 1.0 bar or higher). Flow rate limited to a practical economic level irrespective of supply pressure for suitability with high pressure supplies. Thermostatically set to 41°C with single lever to control flow of water. Durable and easy to clean finish. Supplied complete with strainer/check valves and flow limiters. Serviceable from above the basin (once supplies are isolated). Cartridge based system for easy servicing/repair. Alternative low pressure outlet option supplied. Flow rate with fitted regulator 4.7 litres per minute. Unregulated flow rate 5 litres per minute at 0.3 bar.



Contour 21

thermostatic bath shower mixer


A stylish wall mounted exposed thermostatic fail safe shower with built-in safety stop feature. Small lever operated. Suitable for high pressure systems.

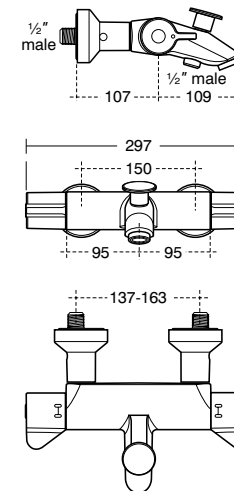

Contour 21

thermostatic bath filler

Wall mounted sequential thermostatic 120mm lever operated fail safe bath filler suitable for balanced and unbalanced systems. Lever handle sealed to help prevent damage from spray cleaners.

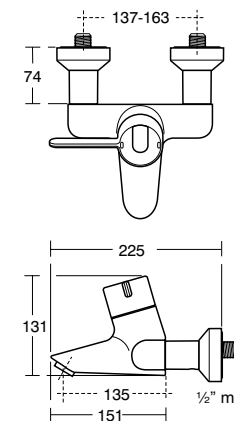

ARMITAGE SHANKS

Domestic and commercial use

DDA compliant

Thermal disinfection facility

Illustrated

A4128 Contour 21 bath shower mixer thermostatic wall mounted

Material

Chrome Plated Metal

Weight

3.8kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for Armaglide and IdealRain shower kits. Inlets and outlet 1/2in BSP male. Inlet isolating valves for front of panel servicing. Thermal disinfection



ARMITAGE SHANKS

Domestic and commercial use

DDA and Doc M compliant

Sealed wall escutcheons

Illustrated

A4135 Contour 21 bath filler thermostatic wall mounted single lever sequential

Material

Chrome Plated Metal

Weight

3.0kg

Colour/Finish

Chromium plated (AA)

Special notes

Operating pressure from 1 to 5 bar. Flow rate 19 Litres per minute at 1.0 bar



Markwik

pillar mixer

Markwik ½" pillar mixer with 150mm levers and swivel nozzle. When taps are closed the levers are parallel to the wall. Suitable for low or high pressure systems.



ARMITAGE SHANKS

Pillar mixers

For washbasins and sinks

Suitable for closed fist operation

Illustrated

S8200 Markwik ½" pillar mixer with 150mm levers single flow pattern swivel nozzle, 125mm projection, anti splash outlet

Weight

2.9kg

Colour/Finish

Chromium plated (AA)


Options

S8207 Markwik ½" pillar mixer, inlets at 200mm with quarter turn 150mm levers, 200mm projection swivel nozzle single flow, antisplash outlet

S8275 Markwik ½" pillar mixer with 150mm levers twin flow pattern, swivel nozzle, 125mm projection, anti splash outlet

Special notes

Flow rate 9 Litres per minute at 0.1 bar

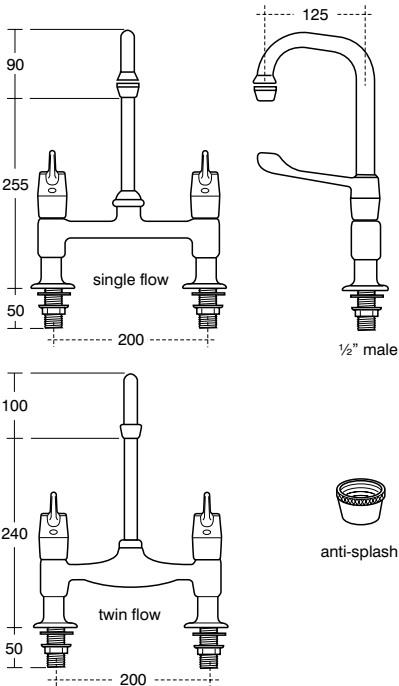

1 : 5 : 2 : 8

Markwik

wall mounted mixer

Markwik ½" wall mounted mixer with 150mm levers and swivel nozzle. When taps are closed the levers are parallel to the wall. Suitable for low or high pressure systems.



ARMITAGE SHANKS

Wall mounted mixers

150mm levers

For washbasins and sinks

Illustrated

S8210 Markwik ½" wall mounted mixer, concealed inlets with 125mm projection single flow swivel nozzle, anti splash outlet, 150mm levers

Weight

3.0kg

Colour/Finish


Chromium plated (AA)

Options

S8205 Markwik ½" wall mounted mixer, exposed inlets with 125mm projection single flow swivel nozzle, Antisplash outlet, 150mm levers

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900AA

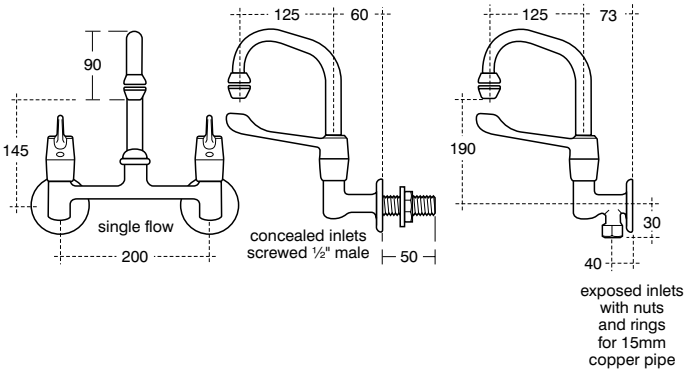

1 : 5 : 2 : 9

Markwik

mixer with built-in servicing

Markwik 1/2" wall mounted mixer with built-in servicing and volume controls for reduction of splashing and as a temporary isolator for servicing.



ARMITAGE SHANKS

Wall mounted mixers

15cm levers

Integral service controls

Illustrated

S8215 Markwik 1/2" wall mounted mixer with 125mm projection single flow swivel nozzle, anti splash outlet, 150mm levers, concealed inlets with built-in servicing and volume controls

Material

Chrome Plated Metal

Weight


3.5kg

Colour/Finish

Chromium plated (AA)

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900AA

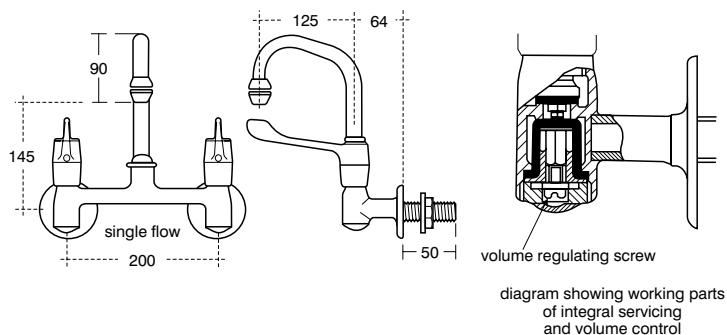

Markwik

mixer with single flow nozzle

Markwik 1/2" wall mounted mixer with 15cm levers and horizontal nozzle for exposed or concealed plumbing. When taps are closed the chrome plated levers are parallel to the wall.



ARMITAGE SHANKS

Wall mounted mixer

15cm levers

For washbasins and sinks

Illustrated

S8230 Markwik 1/2" wall mounted mixer with single flow horizontal nozzle, anti splash outlet, 150mm levers, concealed inlets

Weight

2.3kg

Colour/Finish


Chromium plated (AA)

Options

S8231 Markwik 1/2" wall mounted mixer with single flow horizontal nozzle, thimble spray outlet, 150mm levers, concealed inlets

Special notes

Inlets screwed 1/2in BSP male. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900AA

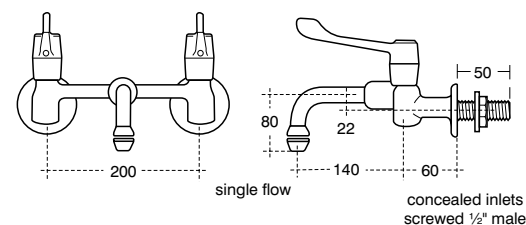

anti-splash



Markwik

high neck pillar taps

Fittings for sinks and sluices. When taps are closed levers are parallel to wall. Suitable for low or high pressure systems.



ARMITAGE SHANKS

150mm lever taps
Suitable for closed fist operation
Chrome plated

Illustrated
S8265 Markwik 1/2" high neck pillar taps

Material
Chrome Plated Metal

Weight
2.3kg

Colour/Finish
Chromium plated (AA)

Special notes
Inlets screwed 1/2in BSP male.



ARMITAGE SHANKS

150mm lever taps
Suitable for closed fist operation

Illustrated
S8270 Markwik 1/2" bib taps
S8336 Bib tap wall mount 1/2" for concealed plumbing (pair)

Material
Chrome Plated Brass

Weight
Bib taps 1.7kg
Wall mount 0.8kg

Colour/Finish
Chromium plated (AA)

Special notes
Inlets screwed 1/2" BSP male. For use in conjunction with sinks and hoppers, with appropriate length extension. Unregulated flow rate 7.2 litres per minute at 0.1 bar



Markwik 21

pillar mixer, single lever sequential with bioguard

Demountable pillar mixer tap with integral thermostat single sequential lever, single flow fixed horizontal nozzle. Sequential operation ensures both hot and cold water is drawn on each use, long lever gives precise control.



ARMITAGE SHANKS

General healthcare
200mm centre tapholes
Built in isolation valves
Thermal disinfection feature
Demount, submerge and disinfect
Front access for D-08 auditing and servicing
Remove and sterilise spout
Bioguard against bacteria


Illustrated
A6242 Markwik 21 integral thermostat, demountable pillar mixer, single sequential lever, Armitage Bioguard outlet fitted

Material
Chrome Plated Metal

Weight
4.9kg

Colours/Finish
Chromium plated (AA)

Special notes
This product is fitted with an Armitage Bioguard outlet which reduces the opportunity for bio film attachment and is lined with anti-microbial copper. Single lever operates on/off and temperature control. Suitable for high and low pressure systems. Access for servicing to simplify D-08 auditing and servicing. Unique built-in sterilisation cleansing feature using Sterilisation kit S8239NU bridging hose which is reusable. Horizontal outlet eliminates water retention associated with 'Swan Neck' designs. Integral thermostat eliminates stagnant warm water trapped between an inline TMV* and the fittings under used cold feed. *Any existing TMV would need to be removed when replacing with our integral thermostat mixer. Especially suitable for use in conjunction with medium and large basins or sinks with tapholes at 200mm between centres. Purging kit A4556AA after installation allows debris to be flushed without affecting the thermostat and aids system disinfection. Flow rate regulated to maximum of 10 Litres per minute

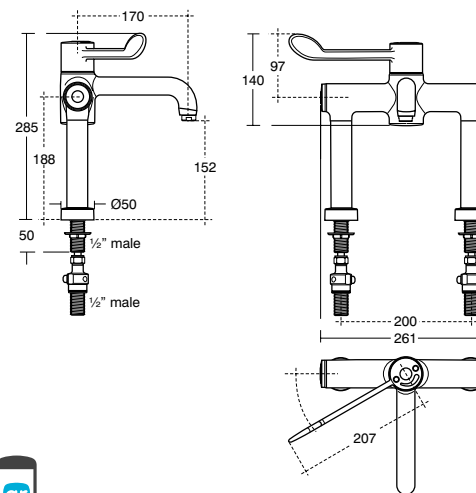

Markwik

bib taps

Long lever fittings for sinks and slop hoppers. When taps are closed levers are parallel to wall. Suitable for low or high pressure systems.



Markwik 21

sequential lever mixer, demountable

Mainly used as a healthcare hospital mixer (TB H6). Demountable panel thermostatic mixer tap removable spout with interchangeable filter and fitted with Armitage Shanks Bioguard.



ARMITAGE SHANKS

Medical and healthcare use
Built in isolation valves
Sequential lever operation
Front access for D-08 auditing and servicing
Thermal disinfection feature
Demount, submerge and disinfect
Remove and sterilise spout
BioGuard against bacteria
Conforms to HBN 04-01
Addendum 2013

Illustrated

A6243 Markwik 21 integral thermostat, demountable panel mixer, single sequential lever, Armitage Bioguard outlet fitted

Material

Chrome Plated Metal

Weight

4.0kg

Colour/Finish


Chromium plated (AA)

Standards

Conforms to HTM64 (2006), HTM04, HFN30

Special notes

This product is fitted with an Armitage Bioguard outlet which reduces the opportunity for bio film attachment and is lined with anti-microbial copper. Single lever operates on/off and temperature control. Suitable for high and low pressure systems. Unique built-in thermal disinfection cleansing feature using kit S8239NU a bridging hose which is reusable. A purging tool A4556AA is also available to facilitate initial installation or aid in system disinfection. * Line drawings shows recommended height over vessel please allow for clearance to any upstands. Especially suited to medium and large hospital pattern integral back outlet basins and washing associated with clinical or nursing procedures

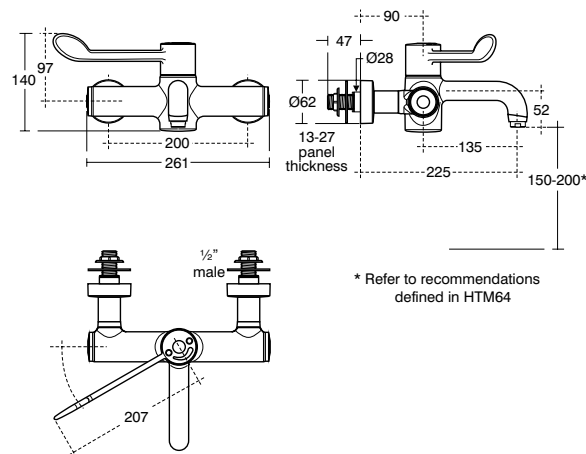

1 : 5 : 2 : 14

Armitage
Shanks

Markwik 21

proximity sensor mixer, demountable

Mainly used as a healthcare hospital mixer (TB H6). Demountable panel thermostatic mixer tap removable spout with interchangeable filter and fitted with Armitage Shanks Bioguard.



ARMITAGE SHANKS

Medical and healthcare use
Built in isolation valves
Proximity sensor operation
Front access for D-08 auditing and servicing
Thermal disinfection feature
Demount, submerge and disinfect
Remove and sterilise spout
BioGuard against bacteria
Conforms to HBN 04-01
Addendum 2013

Illustrated

A6244 Markwik 21 integral thermostat, demountable panel mixer, proximity sensor, Armitage Bioguard outlet fitted

Material

Chrome Plated Metal

Weight

4.9kg

Colour/Finish



Chromium plated (AA)

Standards

Conforms to HTM64 (2006), HTM04, HFN30

Special notes

This product is fitted with an Armitage Bioguard outlet which reduces the opportunity for bio film attachment and is lined with anti-microbial copper. Tap is activated by hand movement over the sensor and water will run for a predetermined length of time, factory pre-set at 1 minute but adjustable. Unique built-in thermal disinfection cleansing feature using kit S8239NU a bridging hose which is re-usable. A purging tool A4556AA is also available to facilitate initial installation or aid in system disinfection. * Line drawing shows recommended height over scrub up troughs. Flow rate regulated to maximum of 10 Litres per minute

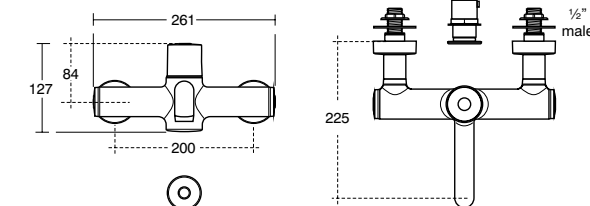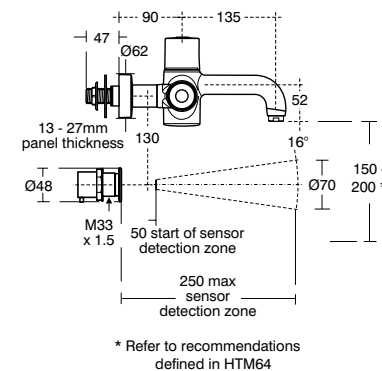


1 : 5 : 2 : 15

Armitage
Shanks

Markwik 21

time flow sensor mixer, demountable

Mainly used as a healthcare hospital mixer (TB H6). Demountable panel thermostatic mixer tap removable spout with interchangeable filter and fitted with Armitage shanks Bioguard. Particular suited for use with to Scrub up troughs.

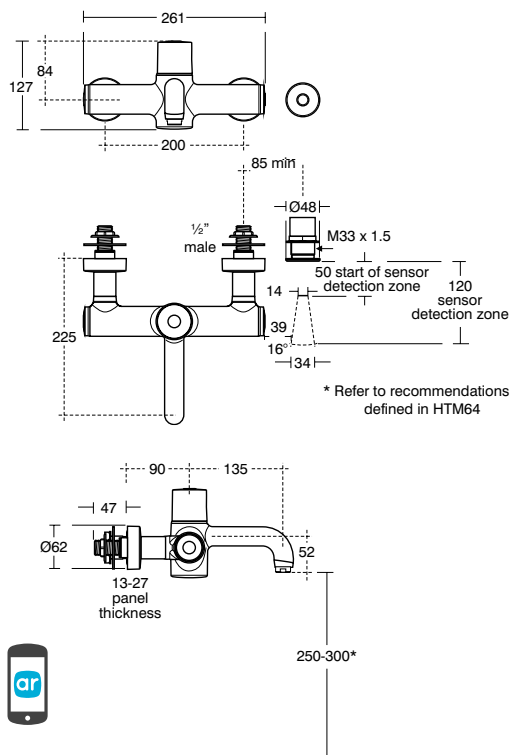

1 : 5 : 2 : 16

ARMITAGE SHANKS

Medical and healthcare use

Built in isolation valves

Timed flow sensor operation

Front access for D-08 auditing and servicing

Thermal disinfection feature

Demount, submerge and disinfect

Remove and sterilise spout

BioGuard against bacteria

Conforms to HBN 04-01

Addendum 2013

Illustrated

A6245 Markwik 21 integral thermostat, demountable panel mixer, time flow sensor, Armitage Bioguard outlet fitted

Material

Chrome Plated Metal

Weight

5.8kg

Colour/Finish

Chromium plated (AA)

Standards

Conforms to HTM64 (2006), HTM04, HFN30

Special notes

This product is fitted with an Armitage Bioguard outlet which reduces the opportunity for bio film attachment and is lined with anti-microbial copper. Tap is activated by hand movement over the sensor and water will run for a predetermined length of time, factory pre-set at 1 minute but adjustable. Unique built-in thermal disinfection cleansing feature using kit S8239NU a bridging hose which is re-usable. A purging tool A4556AA is also available to facilitate initial installation or aid in system disinfection. * Line drawing shows recommended height over scrub up troughs. Flow rate regulated to maximum of 10 Litres per minute

Markwik 21

accessories

Bioguard outlet replaces traditional flow straightener with an open outlet lined with anti-microbial copper. This reduces the opportunity for bio-film attachment. Bioguard can be retro fitted.

Purging tool (re-usable) for insulate versions. Purging tool allows debris to be flushed through after installation and aids system disinfection.

Sterilisation kit includes removable bridging hose which allows hot water to be flushed through all parts of the fitting.



Bioguard outlet



Purging tool



Sterilisation kit



1 : 5 : 2 : 17

ARMITAGE SHANKS

For use in medical and healthcare

Illustrated

F960847 Bioguard outlet

A4556 Markwik purging tool

S8239 Markwik sterilisation kit

Material

Chrome Plated Metal

Colour/Finish

Chromium plated (AA)

Nimbus

inclined bib taps

Suitable for low or high pressure systems.



ARMITAGE SHANKS

Commercial use
Conforms to BS 5412

Illustrated

S7205 Nimbus 1/2" inclined bib taps

S8336 Bib tap wall mounts 1/2" for concealed plumbing (pair)

Weight

Bib taps 0.7kg
Wall mounts 0.8kg

Colour/Finish

Chromium plated (AA)

Options

S7206 Nimbus 1/2" inclined bib taps anti splash outlet dual Hot and Cold indices

Special notes

Inlets screwed BSP male. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900AA. Flow rate 8 Litres per minute at 0.1 bar



Nimbus

inclined bib taps

With thimble spray nozzle
Suitable for low or high pressure systems.



ARMITAGE SHANKS

Commercial use
Conforms to BS 5412

Illustrated

S7211 Nimbus 1/2" inclined bib taps with thimble spray nozzle

S8336 Bib tap wall mounts 1/2" for concealed plumbing (pair)

Material

Chrome Plated Metal

Weight

Bib taps 0.9kg
Wall mounts 0.8kg

Colour/Finish

Chromium plated (AA)

Special notes

Inlets screwed BSP male. Flow rate 8 litres per minute at 0.1 bar



Nimbus

inclined bip taps

With hose union
Suitable for low or high pressure systems.



ARMITAGE SHANKS

Commercial use
Conforms BS 5412

Illustrated

S7207 Nimbus 1/2" inclined bib taps with hose union dual Hot and Cold indices

S8336 Bib tap wall mounts 1/2" for concealed plumbing (pair)

Material

Chrome Plated Metal

Weight

Bib taps 0.9kg
Wall mounts 0.8kg

Colour/Finish

Chromium plated (AA)

Special notes

Flow rate 8 litres per minute at 0.1 bar



Nimbus

inclined bib taps

For washbasins and sinks. Suitable for low or high pressure systems.
Includes flexible hose



ARMITAGE SHANKS

Inclined bib tap
Conforms to BS 5412
Flexible hose and jet

Illustrated

S7208 Nimbus 1/2" inclined bib tap, flexible hose, jet and wall hook

S8335 Bib tap wall mount 1/2" for concealed plumbing (single)

Material

Chrome Plated Metal

Weight

Bib taps 0.8kg
Wall mounts 0.8kg

Colour/Finish

Chromium plated (AA)

Special notes

Concealed inlet screwed 1/2in BSP male. Flow rates 5 litres per minute at 0.1 bar



Brassware

Nimbus

pillar dual flow filler

Nimbus pillar mixers for washbasins and sinks. Suitable for low or high pressure systems. Balanced or unbalanced supplies.



ARMITAGE SHANKS

Commercial applications

Swivel nozzle

Dual flow pillar mixer

Illustrated

S7970 Nimbus ½" pillar dualflow filler and 200mm swivel nozzle with anti splash outlet, inlet centres variable

Material

Chrome Plated Metal

Weight

2.5kg

Colour/Finish


Chromium plated (AA)

Options

S7975 Nimbus ½" pillar mixer with screw down headwork and swivel nozzle, anti splash outlet, single flow, 200mm centres

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900AA

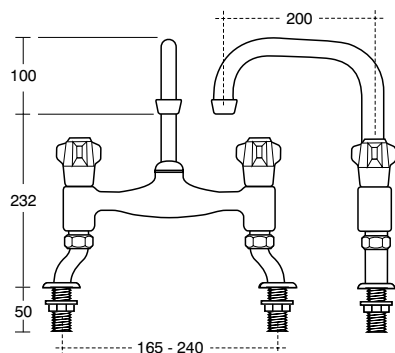

Brassware

Nuastyle

inclined bip taps

All brass fittings, including chrome plated brass handles and patented anti vandal indices. Particularly suitable for contract use.



ARMITAGE SHANKS

Anti vandal indices

Conforms to BS 5412

Illustrated

S7110 Nuastyle ½" inclined bib taps anti vandal indices

S8336 Bib tap wall mounts ½" for concealed plumbing (pair)

Material

Chrome Plated Metal

Weight

Bib taps 2.1kg

Wall mounts 0.8kg

Colour/Finish


Chromium plated (AA)

Options

S7111AA Nuastyle ½" inclined bib taps with dual hot and cold indices

Special notes

Inlets screwed 1/2in BSP male. Servicing valves are recommended for isolating fittings. Unregulated flow rate 8 litres per minute at 0.1 bar



Contract


Brassware

Brassware

Piccolo 21

basin pillar taps

Water saving vandal resistant lever operated brassware. Durable easy clean design with clearly marked (non rub off) hot and cold markings.



ARMITAGE SHANKS

Commercial use

Dual indices

DDA compliant

Illustrated

B8262 Piccolo 21 (was Nuastyle 21) inclined 1/2" washbasin pillar taps, lever operated, dual hot and cold indices, anti-vandal laminar flow water saving outlet

Material

Chrome Plated Metal

Weight

1.6kg

Colour/Finish

Chromium plated (AA)

Special notes


Inlets screwed 1/2in BSP male, bored and coned for 15mm copper tube. Servicing valves are recommended for isolating fittings. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900AA. Regulated flow rate 4.7 litres per minute. Unregulated flow rate 8.5 litres per minute at 0.1 bar.

Brassware

Piccolo 21

basin mixer

A range of compact water saving vandal resistant lever operated brassware.



ARMITAGE SHANKS

Domestic and commercial use

Click water saving cartridge

DDA compliant

Illustrated

B8260 Piccolo 21 washbasin mixer 1 hole single lever, no waste, fitted with Laminar 4.7 litres per minute flow regulator, tamper proof anti vandal outlet, Easy fix, temperature limit stop, flexible tails

Material

Chrome Plated Metal

Weight

1.65kg

Colour/Finish

Chromium plated (AA)

Options

B8261 Piccolo 21 washbasin mixer 1 hole single lever with pop-up waste, fitted with Laminar 4.7 litres per minute flow regulator, tamper proof anti vandal outlet, Easy fix, temperature limit stop, flexible tails

B0270 Piccolo 21 washbasin mixer 1 hole single lever, no waste, fitted with Laminar 4.7 litres per minute flow regulator, tamper proof anti vandal outlet, Easy fix, temperature limit stop, copper tails

B9135 Piccolo 21 washbasin mixer 1 hole single lever with pop-up waste, fitted 5 litres per minute aerated flow regulator, optional flow straightener, EasyFix, temperature limit stop, flexible tails

B0271 Piccolo 21 washbasin mixer 1 hole single lever with weighted chain, fitted 5 litres per minute aerated flow regulator, optional flow straightener, EasyFix, temperature limit stop, flexible tails.

Special notes

The CLICK cartridge offers water saving as slight resistance informs the user that only 50% of flow is being used. Also features a limiting device that can restrict movement of the handle on the hot side, adding a major safety feature. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Regulated flow rate 4.7 or 5.0 litres per minute. Unregulated flow rate 5 litres per minute at 0.1 bar



Brassware

Piccolo 21 bath filler

A range of compact water saving vandal resistant lever operated brassware.

ARMITAGE SHANKS

Domestic and commercial use
DDA compliant

Illustrated

B9138 Piccolo 21 bath filler 1 hole single lever, copper tails

Material

Chrome Plated Metal

Weight


2.5kg

Colour/Finish

Chromium plated (AA)

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5901. Flow rate 12.5 litres per minute at 0.1 bar

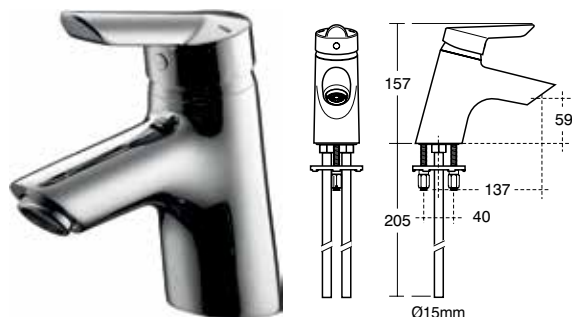

Piccolo 21 bath shower mixer

A range of compact water saving vandal resistant lever operated brassware.

ARMITAGE SHANKS

Domestic and commercial use
Mixer and single function kit
Multi-port

Illustrated

B9139 Piccolo 21 bath shower mixer 1 hole single lever with Armaglide 2 shower set, copper tails

Material

Chrome Plated Metal

Weight


3.5kg

Colour/Finish

Chromium plated (AA)

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5901. Flow rates 12.5 litres per minute at 0.1 bar bath filler 3.5 litres per minute at 0.1 bar shower handspray

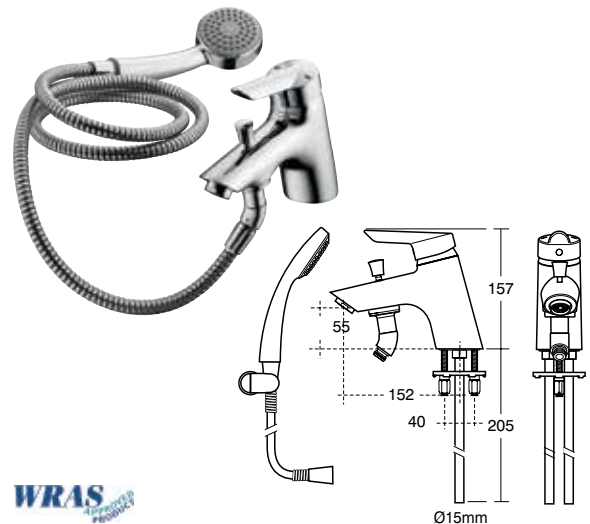

1 : 5 : 2 : 24

Armitage
Shanks

Brassware

Piccolo 21 bath filler

A range of compact water saving vandal resistant lever operated brassware.

ARMITAGE SHANKS

Domestic and Commercial use
Flow straightener
3/4in backnuts

Illustrated

B9140 Piccolo 21 bath filler 2 hole dual control

Material

Chrome Plated Metal

Weight


3.1kg

Colour/Finish

Chromium plated (AA)

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device

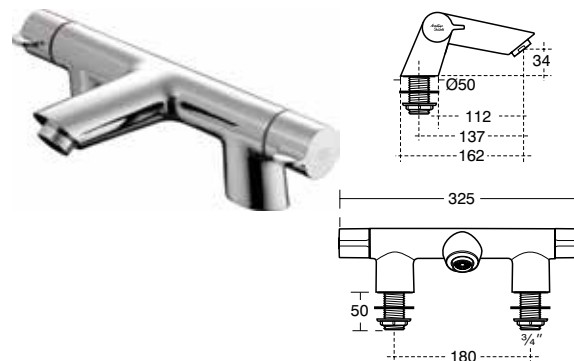

Piccolo 21 bath shower mixer

A range of compact water saving vandal resistant lever operated brassware.

ARMITAGE SHANKS

Domestic and Commercial use
Single function kit

Illustrated

B9141 Piccolo 21 bath shower mixer 2 hole dual control with Armaglide 2 shower set

Material

Chrome Plated Metal

Weight


4.4kg

Colour/Finish

Chromium plated (AA)

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5901. Flow rates 16.5 litres per minute at 0.1 bar bath filler 3.5 litres per minute at 0.1 bar shower handset

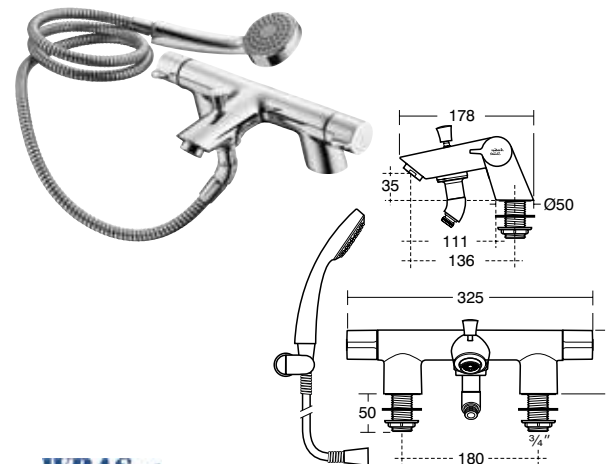

1 : 5 : 2 : 25


Armitage
Shanks

Brassware

Piccolo 21

thermostatic bath shower mixer

A range of compact water saving vandal resistant lever operated brassware.

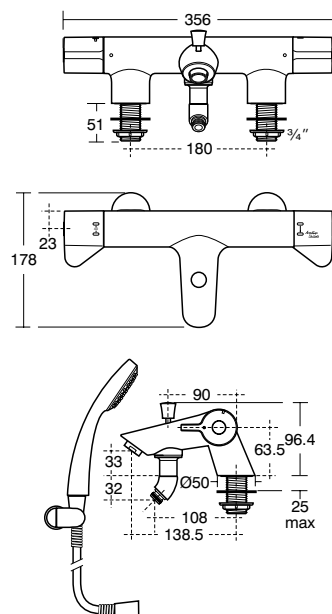

ARMITAGE SHANKS

Domestic and commercial use
Single function set

Illustrated

A4989 Piccolo 21 thermostatic 2 hole bath filler and Armaglide 2 shower set

Material

Chrome Plated Metal

Weight

5.6kg

Colour/Finish

Chromium plated (AA)

Special notes


Flow rates 14 litres per minute at 2 bar bath filler

Brassware

Sandringham

self closing pillar taps

Sandringham non-convulsive self closing 1/2" pillar taps, H and C dual indices.



ARMITAGE SHANKS

Commercial use
Self closing

Illustrated

S7029 Sandringham self closing non-convulsive pillar taps, dual Hot and Cold indices

Material

Chrome Plated Metal

Weight

1.2kg

Colour/Finish

Chromium plated (AA)

Special notes

Flow rate 3 litres per minute at 1 bar

Contract

Brassware



1 : 5 : 2 : 26

Armitage
Shanks



1 : 5 : 2 : 27

Armitage
Shanks

Sandringham 21

washbasin pillar taps

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles, one of 3 handle designs.



ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

One of three handle designs

Illustrated

B9865 Sandringham 21 Washbasin Pillar Taps

Material

Chrome Plated Metal

Weight

1.0kg

Colour/Finish

Chromium plated (AA)

Options

B0356 Pillar taps with 4 litres per minute fitted inlet flow regulators.

Special notes

Suitable for balanced/unbalanced supplies. Inlets screwed 1/2in BSP male, coned for copper. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see S7435AA. Unregulated flow rate 15 litres per minute at 0.1 bar.



Sandringham 21

bath pillar taps

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles, one of 3 handle designs.



ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

One of three handle designs

Illustrated

B9866 Sandringham 21 bath pillar taps

Material

Chrome Plated Metal

Weight

1.1kg

Colour/Finish

Chromium plated (AA)

Special notes


Suitable for balanced/unbalanced supplies high or low pressure. Inlets 3/4" BSP male coned for copper. Pillar taps come supplied with brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 15 litres per minute at 0.1 bar



Sandringham 21

washbasin mixer with pop up waste

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles.



ARMITAGE SHANKS

Domestic and commercial use

Pop up waste

Screw down mechanism

Illustrated

B9868 Sandringham 21 washbasin mixer 1 taphole with pop-up waste

Material

Chrome Plated Metal

Weight

1.5kg

Colour/Finish

Chromium plated (AA)

Options

B0357 Sandringham 21 washbasin mixer 1 taphole with 4 litres per minute inlet flow regulators and pop-up waste

Special notes

Suitable for balanced supplies. Inlets with flexible hoses and connections for 15mm copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 8.5 litres per minute at 0.1 bar



Sandringham 21

washbasin mixer no waste

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles.



ARMITAGE SHANKS

Domestic and commercial use

No waste version

Screw down mechanism

Illustrated

B9867 Sandringham 21 washbasin mixer 1 taphole

Material

Chrome Plated Metal

Weight

1.5kg

Colour/Finish

Chromium plated (AA)

Options

B9869 Sandringham 21 washbasin mixer with weighted chain

Special notes


Suitable for balanced supplies high or low pressure. Inlets with flexible hoses and connections for 15mm copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 8.5 litres per minute at 0.1 bar



Sandringham 21

bath filler

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles.

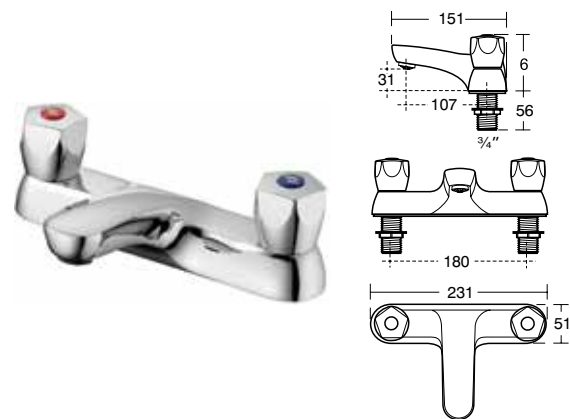

ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

One of three handle designs

Illustrated

B9870 Sandringham 21 bath filler 2 hole

Material

Chrome Plated Metal

Weight

2.1kg

Colour/Finish

Chromium plated (AA)

Special notes


Suitable for balanced/unbalanced supplies high or low pressure. Inlets 3/4in BSP male coned for copper. Brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 22 litres per minute at 0.1 bar



Sandringham 21

bath shower mixer

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles.

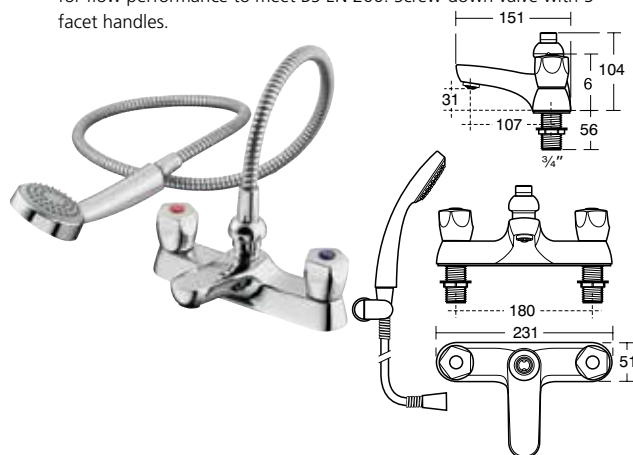

ARMITAGE SHANKS

Domestic and commercial use

Includes shower set

Screw down mechanism

Illustrated

B9871 Sandringham 21 bath shower 2 hole mixer with Armaglide 2 shower set

Material

Chrome Plated Metal

Weight

3.0kg

Colour/Finish

Chromium plated (AA)

Options

B9908 Fixed height handspray holder

B9909 Category 3 hose retaining bracket

Special notes

Suitable for balanced high or low pressure supplies. Inlets 3/4in BSP male coned for copper. Pillar taps come supplied with brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 21 litres per minute at 0.1 bar



1 : 5 : 2 : 30

Armitage
Shanks

Sandringham 21

washbasin pillar taps


New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with crosshead handles one of 3 handle designs.



Sandringham 21

bath pillar taps

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with crosshead handles one of 3 handle designs.



ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

One of three handle designs

Illustrated

B9875 Sandringham 21 washbasin pillar taps, crosshead handles

Material

Chrome Plated Metal

Weight

1.1kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies high or low pressure. Inlets screwed 1/2in BSP male, coned for copper. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 15 litres per minute at 0.1 bar



ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

One of three handle designs

Illustrated

B9876 Sandringham 21 bath pillar taps, crosshead handles

Material

Chrome Plated Metal

Weight

1.2kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies high or low pressure. Inlets 3/4in BSP male coned for copper. Pillar taps come supplied with brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 15 litres per minute at 0.1 bar




1 : 5 : 2 : 31

Armitage
Shanks

Sandringham 21 bath filler

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with crosshead handles.

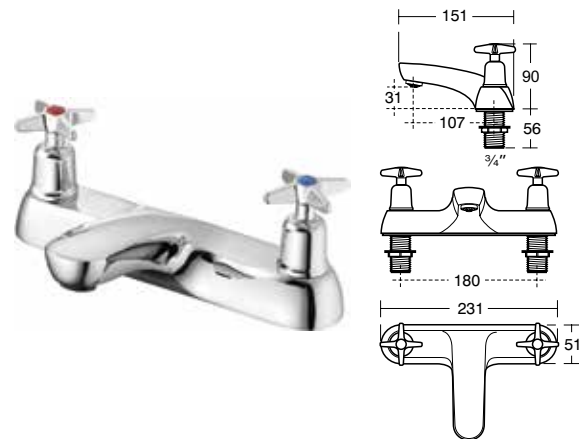

ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

One of three handle designs

Illustrated

B9877 Sandringham 21 bath filler 2 hole, crosshead handles

Material

Chrome Plated Metal

Weight

2.0kg

Colour/Finish

Chromium plated (AA)


Special notes

Suitable for balanced/unbalanced supplies. Inlets 3/4in BSP male coned for copper. Brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate: 22 litres per minute at 0.1 bar



Sandringham 21 bath shower mixer

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with crosshead handles.

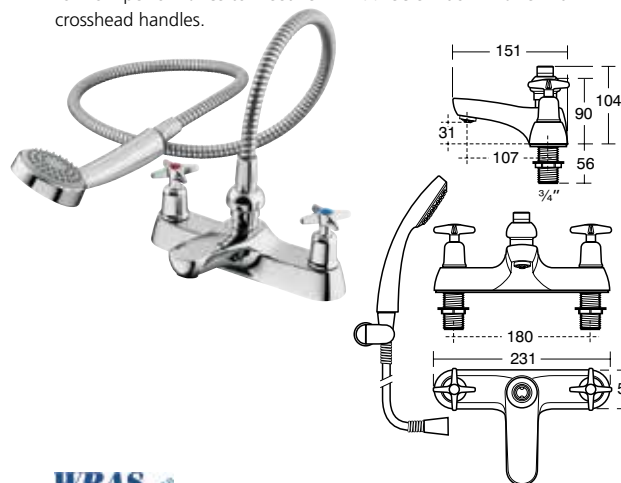

ARMITAGE SHANKS

Domestic and commercial use

Includes shower set

Screw down mechanism

Illustrated

B9878 Sandringham 21 bath shower mixer 2 hole with Armaglide 2 shower set, crosshead handles

Material

Chrome Plated Metal

Weight

3.0kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced high or low pressure supplies. Inlets 3/4in BSP male coned for copper. Brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 21 litres per minute at 0.1 bar



Sandringham 21 washbasin pillar taps

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Ceramic disc lever operation handles one of 3 handle designs.



ARMITAGE SHANKS

Domestic and commercial use

'Drip free' Ceramic disc

One of three handle designs

Illustrated

B9881 Sandringham 21 washbasin pillar taps, lever handles

Material

Chrome Plated Metal

Weight

1.1kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies. Inlets screwed 1/2in BSP male, coned for copper. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 8.2 litres per minute at 0.1 bar



Sandringham 21 bath pillar taps

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Ceramic disc with lever operation handles, one of 3 handle designs.



ARMITAGE SHANKS

Domestic and commercial use

'Drip free' Ceramic disc

One of three handle designs

Illustrated

B9882 Sandringham 21 bath pillar taps, lever handles

Material

Chrome Plated Metal

Weight

1.2kg

Colour/Finish

Chromium plated (AA)


Special notes

Suitable for balanced high or low pressure supplies. Inlets 3/4in BSP male coned for copper. Pillar taps come supplied with brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 8.2 litres per minute at 0.1 bar



Sandringham 21 bath filler

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Ceramic disc with lever handles.

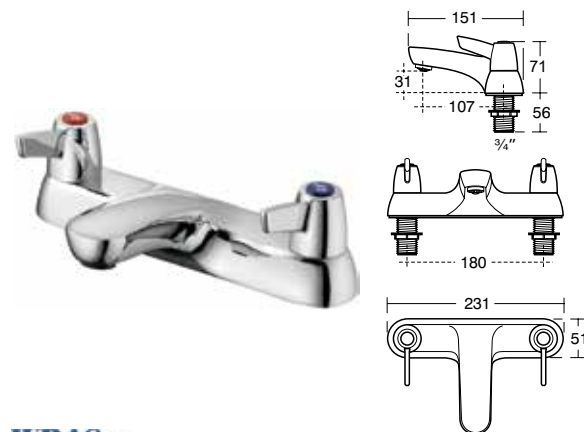

ARMITAGE SHANKS

Domestic and commercial use

'Drip free' Ceramic disc

One of three handle designs

Illustrated

B9883 Sandringham 21 bath filler 2 hole, lever handles

Material

Chrome Plated Metal

Weight

2.1kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced high or low pressure supplies. Inlets 3/4in BSP male coned for copper. Brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 15 litres per minute at 0.1 bar



ARMITAGE SHANKS

Domestic and commercial use

Includes shower set

'Drip free' Ceramic disc

Illustrated

B9884 Sandringham 21 bath shower mixer 2 hole with Armaglide 2 shower set, lever handles

Material

Chrome Plated Metal

Weight

3.0kg

Colour/Finish

Chromium plated (AA)

Options

B9908 Fixed height handspray holder

B9909 Category 3 hose retaining bracket


Special notes

Suitable for balanced high or low pressure supplies. Inlets 3/4in BSP male coned for copper. Brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 14 litres per minute at 0.1 bar.



Sandringham 21 bath shower mixer

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Ceramic disc with lever handles.

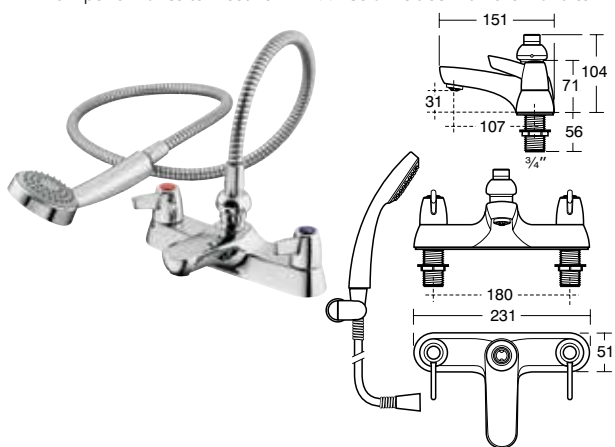

Sandringham SL basin mixer

A single lever operated mixer fitting providing economic cost solutions combined with water saving. The mixers feature a CLICK cartridge which offers a limit on water flow by 50%.



Sandringham SL basin mixer with weighted chain

A single lever operated mixer fitting providing economic cost solutions combined with water saving. The mixers feature a CLICK cartridge which offers a limit on water flow by 50%.



ARMITAGE SHANKS

Domestic and commercial use

Water saving

Suitable for closed fist operation

Illustrated

B4447 Sandringham SL washbasin mixer 1 hole, lever operated with pop-up waste, 5 litre per minute flow regulator aerator fitted

Weight

2.1kg

Colour/Finish

Chromium plated (AA)

Options

B9208 Sandringham SL washbasin mixer 1 hole, lever operated, 5 litres per minute, no waste

Special notes

The CLICK cartridge offers water saving by encouraging the user to only lift open the handle before coming against slight resistance. Flow rate with fitted regulator 5 litres per minute. Unregulated flow rate 5 litres per minute at 0.1 bar



ARMITAGE SHANKS

Domestic and commercial use

Water saving

Suitable for closed fist operation

Illustrated

S7373 Sandringham SL washbasin mixer 1 hole, single lever, water saving CLICK cartridge, weighted chain, 5 litre per minute flow regulator aerator fitted

Material

Chrome Plated Metal

Weight

2.1kg

Colour/Finish

Chromium plated (AA)


Special notes

The CLICK cartridge offers water saving by encouraging the user to only lift open the handle before coming against slight resistance, adding a major safety feature. Flow rate with fitted regulator 5 litres per minute. Unregulated flow rate 5 litres per minute at 0.1 bar



Sandringham SL bidet mixer

A single lever operated mixer fitting providing economic cost solutions combined with water saving. The mixers feature a CLICK cartridge which offers a limit on water flow by 50%.

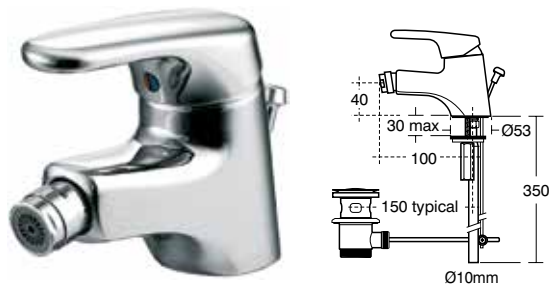

ARMITAGE SHANKS

Domestic and commercial use

Water saving

Suitable for closed fist operation

Illustrated

B4448 Sandringham SL bidet mixer 1 hole, lever operated, water saving CLICK cartridge, pop-up waste

Material

Chrome Plated Metal

Weight

1.7kg

Colour/Finish

Chromium plated (AA)


Special notes

The CLICK cartridge offers water saving by encouraging the user to only lift open the handle before coming against slight resistance. This resistance informs the user that the fitting is delivering only 50% of its maximum flow potential. Unregulated flow rate 4 litres per minute at 0.1 bar



Sandringham SL bath filler

Two hole dual control rim mounted bath mixers designed to complement the washbasin and bidet mixers. The mixers incorporate 3/4" ceramic disc cartridges to provide maximum flow rate.

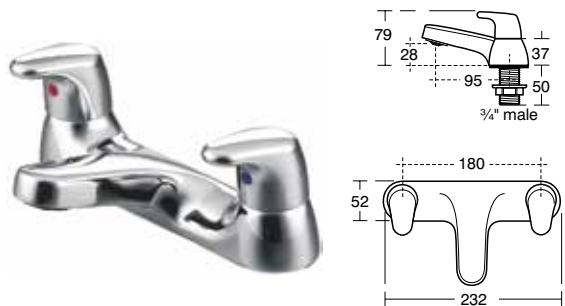

ARMITAGE SHANKS

Domestic and commercial use

Drip free ceramic disc internals

Traditional 2 hole design

Illustrated

E5069 Sandringham SL bath filler 2 hole dual control lever operated deck single flow

Material

Chrome Plated Metal

Weight

3.7kg

Colour/Finish

Chromium plated (AA)

Special notes

Inlets screwed 3/4in BSP male, coned for 22mm copper. When installed in commercial premises a 22mm thermostatic blending valve must be used. Unregulated flow rate 7.6 litres per minute at 0.1 bar



Sandringham SL bath shower mixer

Two hole dual control rim mounted bath mixers designed to complement the washbasin and bidet mixers. The mixers incorporate 3/4" ceramic disc cartridges to provide maximum flow rate. Supplied complete with fitted levers. Suitable for high or low pressure balanced systems.



ARMITAGE SHANKS

Domestic and commercial use

Drip free ceramic disc internals

Traditional 2 hole design

Suitable for closed fist operation

Illustrated

E5068 Sandringham SL bath shower mixer 2 hole dual control lever operated with Armaglide 2 shower set

Material

Chrome Plated Metal

Weight


3.5kg

Colour/Finish

Chromium plated (AA)

Special notes

Inlets screwed 3/4in BSP male, coned for 22mm copper. When installed in commercial premises a 22mm thermostatic blending valve must be used. Unregulated flow rate 15 litres per minute at 0.1 bar

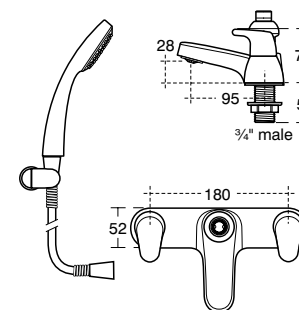

Sensorflow 21

compact wall spout 150mm

A range of sensor operated brassware with integral sensor. Demand for hygiene and water saving is met by a range of no touch electronic taps, second to none. Fitted with an anti vandal 4.7 litres per minute laminar flow regulator.



ARMITAGE SHANKS

Commercial use

DDA compliant

Modern, no moving parts

Illustrated

A4846 Sensorflow 21 compact tubular panel mounted 150mm projection spout, mains

Weight

1.7kg

Colour/Finish

Chromium plated (AA), Brushed Steel (GN)

Options

A4847 Sensorflow 21 compact tubular panel mounted 150mm projection spout, link

A4845 Sensorflow 21 compact tubular panel mounted 150mm projection spout, battery

Special notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Regulated flow rate 4.7 litres per minute. Unregulated flow rate 5 litres per minute at 0.5 bar

Sensorflow 21

compact wall spout 230mm

A range of sensor operated brassware with integral sensor. Demand for hygiene and water saving is met by a range of no touch electronic taps, second to none. Fitted with an anti vandal 4.7 litres per minute laminar flow regulator.



ARMITAGE SHANKS

Commercial use

DDA compliant

Modern, no moving parts

Illustrated

A4849 Sensorflow 21 compact tubular panel mounted 230mm projection spout, mains

Weight

1.8kg

Colour/Finish

Chromium plated (AA), Brushed Steel (GN)




Options

A4850 Sensorflow 21 compact tubular panel mounted 230mm projection spout, link

A4848 Sensorflow 21 compact tubular panel mounted 230mm projection spout, battery

Special notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Regulated flow rate 4.7 litres per minute. Unregulated flow rate 5 litres per minute at 0.5 bar

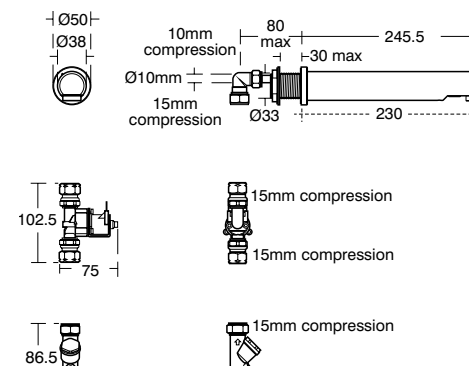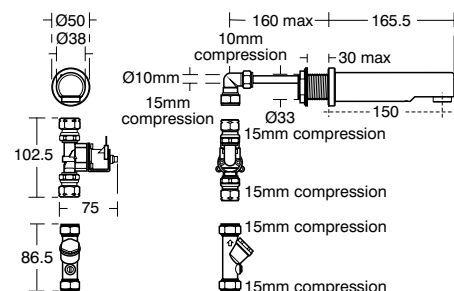

Sensorflow 21

wall spout 230mm – separate sensor

Sensorflow 21 range offers every type of sensing brassware including a proximity separate sensor ideal for panel systems. Fitted with an anti vandal 4.7 litres per minute laminar flow regulator.



ARMITAGE SHANKS

Commercial use

Hygienic "no touch" operation

DDA compliant

Illustrated

A4183 Sensorflow 21 tubular panel mounted 230mm projection, mains

Weight

2.5kg

Colour/Finish

Chromium plated (AA), Brushed Steel (GN)


Options

A4184 Sensorflow 21 tubular panel mounted 230mm projection, link

A4182 Sensorflow 21 tubular panel mounted 230mm projection spout, battery

Special notes

Designed to be supplied with pre-mixed water consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Regulated flow rate 4.7 litres per minute.

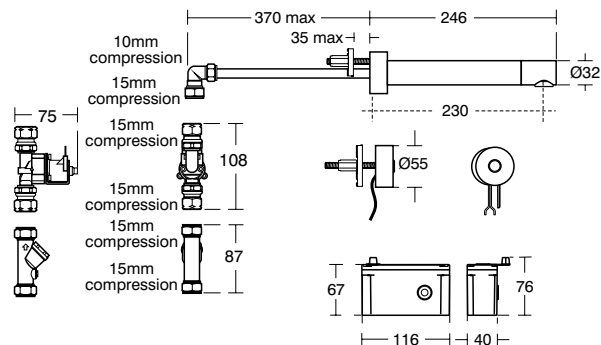

Sensorflow 21

wall spout 150mm – separate sensor

Sensorflow 21 range offers every type of sensing brassware including a proximity separate sensor ideal for panel systems. Fitted with an anti vandal 4.7 litres per minute laminar flow regulator.



ARMITAGE SHANKS

Commercial use

Hygienic "no touch" operation

DDA compliant

Illustrated

A4180 Sensorflow 21 tubular panel mounted 150mm projection, mains

Weight

2.5kg

Colour/Finish

Chromium plated (AA), Brushed Steel (GN)


Options

A4181 Sensorflow 21 tubular panel mounted 150mm projection spout, link

A4126 Sensorflow 21 tubular panel mounted 150mm projection spout, battery

Special notes

Designed to be supplied with pre-mixed water consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Regulated flow rate 4.7 litres per minute.

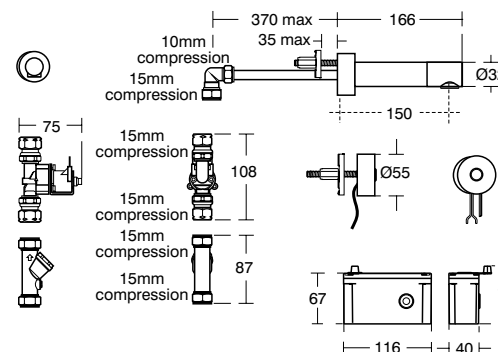

Sensorflow 21

electronic spout

A range of sensor operated brassware with integral sensor. Demand for hygiene and water saving is met by a range of hands free electronic taps, second to none. Fitted with an anti vandal 4.7 litres per minute laminar flow regulator.



ARMITAGE SHANKS

Commercial use

DDA compliant

Hygienic "no touch" operation

Illustrated

A4171 Sensorflow 21 washbasin mounted tall spout, mains

Weight

3.6kg

Colour/Finish

Chromium plated (AA), Brushed Steel (GN)


Options

A4172 Sensorflow 21 washbasin mounted tall spout, link

A4122 Sensorflow 21 washbasin mounted tall spout, battery

Special notes

Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Regulated flow rate 4.7 litres per minute.

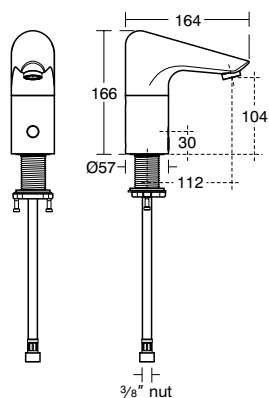

Sensorflow 21

electronic small spout

A range of sensor operated brassware with integral sensor. Demand for hygiene and water saving is met by a range of hands free electronic taps, second to none. Fitted with an anti vandal 4.7 litres per minute laminar flow regulator.



ARMITAGE SHANKS

Commercial use

DDA compliant

Hygienic

Illustrated

A4798 Sensorflow 21 washbasin mounted spout, mains

Weight

3.0kg

Colour/Finish

Chromium plated (AA), Brushed Steel (GN)


Options

A4799 Sensorflow 21 washbasin mounted spout, link

A4664 Sensorflow 21 washbasin mounted spout, battery

Special notes


Designed to be supplied with pre-mixed water. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Regulated flow rate 4.7 litres per minute.

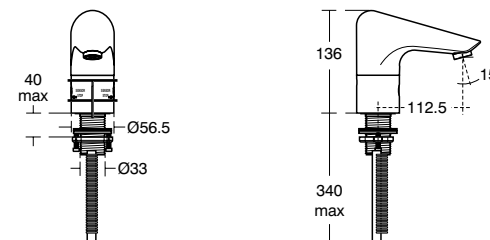

Sensorflow 21

cast spout with built-in sensor

Sensorflow 21 range offers every type of sensing brassware. Cast spout with built-in sensor. Do not connect to an interruptible power supply as this can invoke unintentional re-programming. Fitted with an anti vandal 4.7 litres per minute laminar flow regulator.

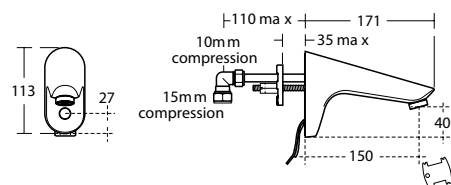

ARMITAGE SHANKS

Commercial use

Anti vandal

DDA compliant

Hygienic "no touch" operation

Chrome plated

Illustrated

A4178 Sensorflow 21 panel mounted 15cm cast spout integral sensor, flexible inlet tail, solenoid valve, combined servicing valve and filter, sensor and solenoid cables, copper tube inlets, mains (Also in Brushed Steel (GN))

Material

Chrome Plated Metal

Weight

2.4kg

Colour/Finish

Chromium plated (AA), Brushed Steel (GN)

Options

A4179 Sensorflow 21 panel mounted 15cm cast spout integral sensor, flexible inlet tail, solenoid valve, combined servicing valve and filter sensor and solenoid cables, copper tube inlets, link (Also in Brushed Steel (GN))

A4125 Sensorflow 21 panel mounted 15cm cast spout integral sensor, flexible inlet tail, solenoid valve, combined servicing valve and filter, sensor and solenoid cables, copper tube inlets, battery (Also in Brushed Steel (GN))


Special notes

All spouts supplied complete with individual solenoid valve, copper tube inlet and combined servicing valve and filter. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900. Spouts with integral sensors detect hands within the sensing range and the solenoid valve is opened. Automatically shuts off if sensor is obstructed for a maximum of 50 seconds. Mains powered transformer with option to use up to 5 link units per main unit or stand alone battery powered units. Regulated flow rate 4.7 litres per minute.

Starlite

hairdressers basin mixer

Starlite hairdressers single taphole mixer with metal handles, flexible hose, handspray and metal sleeve.

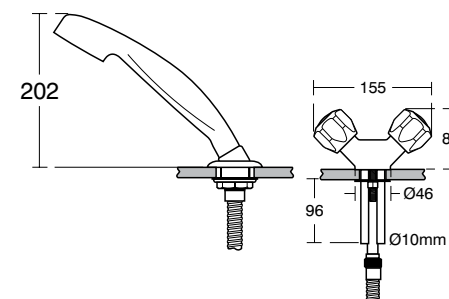

ARMITAGE SHANKS

Hairdressers use

Flexible hose

Illustrated

S7450 Starlite hairdressers washbasin mixer 1 hole with metal handles, flexible hose, handspray and metal sleeve. Inlets plain 10mm copper pipe.

Material

Chrome Plated Metal

Weight

1.8kg

Colour/Finish

Chromium plated (AA)

Special notes

Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device

Brassware

Outlet for washbasins concealed supplies

Washbasin outlets for concealed supplies, choice of antispash or thimble spray 230mm projection. Short projection shower head for concealed or exposed supply.



ARMITAGE SHANKS

Washbasin outlet
Antispash nozzle
Chrome plated

Illustrated

S9316 Spout, wall outlet for concealed supply, projection 23cm with Antispash nozzle

Material

Chrome Plated Metal

Weight


0.9kg

Colour/Finish

Chromium plated (AA)

Special notes

Inlets screwed 1/2in BSP male. Flow rate 4.4 litres per minute at 0.1 bar. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device see A5900AA or Part G for guidance




1 : 5 : 2 : 48

Armitage
Shanks

Brassware


Mixing valve thermostatic

Thermostatic mixing valve are to supply premixed water to a set temperature to basin, bidet, bath or shower.



Mixing valve 22mm thermostatic

Thermostatic mixing valves are to supply premixed water to a set temperature to basin, bidet, bath or shower.



ARMITAGE SHANKS

Automatic shut off
Precise temperature control
Hygienic

Illustrated

A5900 TMV Thermostatic mixing valve 15mm

Weight

0.6kg

Colour/Finish

Chromium plated (AA)

Special notes

Operating pressures from 0.2 to 5.0 bar, 10 bar static pressure. Recommended supply temperatures, Hot 52-65 degrees Centigrade, Cold 5-20 degrees Centigrade. For best results both supplies should be at equal pressures. The valve is eminently suitable for multi point usage. Suitable for basin filling.



ARMITAGE SHANKS

Automatic shut off
Precise temperature control
Hygienic

Illustrated

A5901 TMV Thermostatic mixing valve 22mm

Material

Chrome Plated Metal

Weight

1.7kg

Colour/Finish

Chromium plated (AA)

Special notes

Operating pressures from 0.2 to 5.0 bar, 10 bar static pressure. Recommended supply temperatures, Hot 52-65 degrees Centigrade, Cold 5-20 degrees Centigrade. For best results both supplies should be at equal pressures. The valve is eminently suitable for multi point usage. Suitable for basin filling.



1 : 5 : 2 : 49

Armitage
Shanks

Contract

Brassware


Brassware

Kitchen

Brassware

Adriana sink mixer

Single lever sink mixer with an elegant and minimal design. Contemporary and safe, it is equipped with Click cartridge, which offers a limit on water flow by 50% and Temperature limit stop, allowing restriction of the handle's movement and thus protection from scalding.

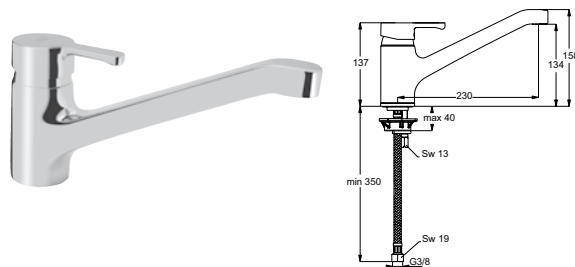

- ARMITAGE SHANKS
- Domestic and commercial use
- Lever operated mixers
- Ceramic disc
- Click cartridge
- Temperature limit stop
- Suitable for closed fist operation

Illustrated
B9785 Adriana single lever one hole sink mixer with 47mm cartridge

Material
Chrome plated Metal

Weight
1.5kg

Colour/Finish
Chromium plated (AA)

Options
B960889NU Aerator cache PCA M21.5X1 5l/min (with key)

Special Notes
Flexible Hoses G3/8". Easy - fix system installation



- ARMITAGE SHANKS
- Domestic and commercial use
- Lever operated mixers
- Ceramic disc
- Click cartridge
- Temperature limit stop
- Suitable for closed fist operation

Illustrated
B9786 Adriana single lever one hole sink mixer with 47mm cartridge, single flow two function pull-out swivel spout

Material
Chrome plated Metal

Weight
2.8kg


Colour/Finish
Chromium plated (AA)

Special Notes
Flexible Hoses G3/8". Easy - fix system installation



Adriana sink mixer with pull-out spout

Single lever sink mixer with practical pull-out spray and an elegant, minimal design. Contemporary and safe, it is equipped with Click cartridge, which offers a limit on water flow by 50% and Temperature limit stop, allowing restriction of the handle's movement and thus protection from scalding.

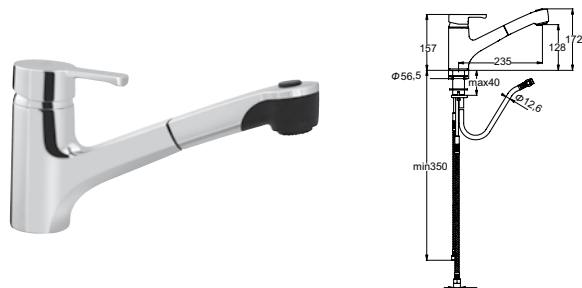

Brassware

Golf - Design sink mixer

Single lever sink mixer that follows a "soft-edge" design concept, giving it smooth, harmonised, friendly form. Ecological, economical & safe, it is equipped with Click Technology, which offers a limit on water flow by 50%. The Temperature limit stop allows the user to have the maximum water heat level of his personal choice, reducing risk of scalding.



- ARMITAGE SHANKS
- Domestic and commercial use
- Lever operated mixers
- Ceramic disc
- Click cartridge
- Temperature limit stop
- Suitable for closed fist operation

Illustrated
B9777 Golf - Design single lever one hole sink mixer with 47mm cartridge


Material
Chrome plated Metal

Weight
2.3kg

Colour/Finish
Chromium plated (AA)

Options
B960852AA Aerator cascade PCA M24X1 5l/min

Special Notes
Flexible Hoses G3/8". Easy - fix system installation

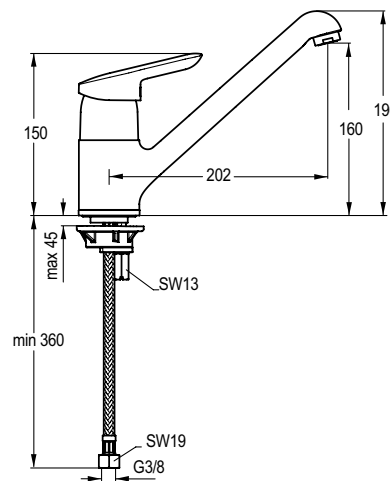


Brassware

Livia

sink mixer

Single lever sink mixer for a contemporary styling concept. Eco friendly and safe thanks to Click Technology and Temperature limit stop, this Livia mixer facilitates the user to reduce water consumption as well as the risk of scalding.

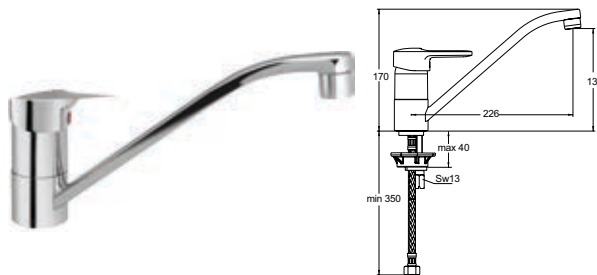

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Click cartridge

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9771 Livia single lever one hole sink mixer with 40mm Click cartridge

Material

Chrome plated Metal

Weight

1.3kg

Colour/Finish

Chromium plated (AA)

Options

B960884AA Aerator cascade PCA M22X1 3,8l/min

Special Notes


Flexible Hoses G3/8". Easy - fix system installation



Livia

exposed sink mixer

Single lever exposed sink mixer with a practical tubular spout for a contemporary styling concept. Eco friendly and safe thanks to Click Technology and Temperature limit stop, this Livia mixer facilitates the user to reduce water consumption as well as the risk of scalding.

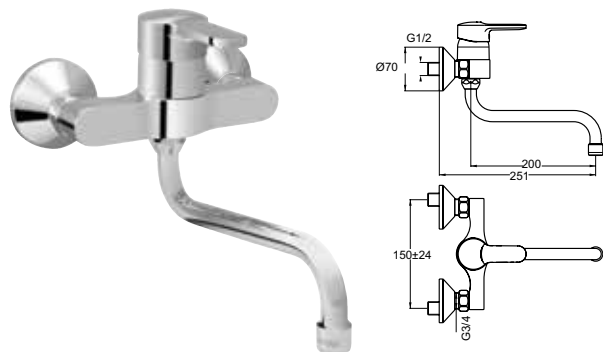

ARMITAGE SHANKS

Domestic and commercial use

Lever operated mixers

Ceramic disc

Click cartridge

Temperature limit stop

Suitable for closed fist operation

Illustrated

B9772 Livia single lever exposed sink mixer with 40mm Click cartridge and 200mm tubular spout

Material

Chrome plated Metal

Weight

1.5kg

Colour/Finish

Chromium plated (AA)

Options

B960884AA Aerator cascade PCA M22X1 3,8l/min

Special Notes

S-connectors



1 : 5 : 3 : 4

Brassware

Sandringham 21

sink pillar taps

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles one of 3 handle designs.



ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

One of three handle designs

Illustrated

B9872 Sandringham 21 sink pillar taps high neck

Material

Chrome Plated Metal

Weight

1.3kg

Colour/Finish

Chromium plated (AA)

Special notes


Suitable for balanced/unbalanced supplies high or low pressure. Inlets screwed 1/2in BSP male, coned for copper. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Water saving can be achieved by use of a flow regulators such as L6935NU to deliver maximum of 4 litres per minute. Unregulated flow rate 15 litres per minute at 0.1 bar



Sandringham 21

sink mixer

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles.

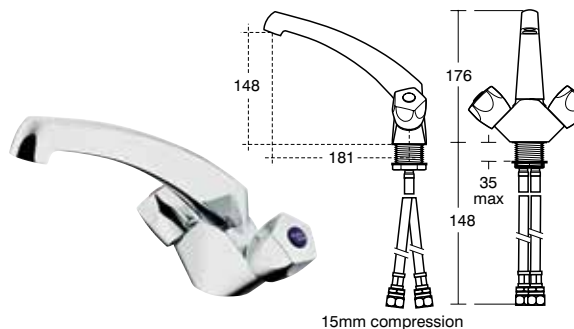

ARMITAGE SHANKS

Domestic and commercial use

Screw down mechanism

Illustrated

B9874 Sandringham sink filler 1 taphole dual flow, swivel spout

Material

Chrome Plated Metal

Weight

2.5kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies high or low pressure. Inlets with flexible hoses and connections for 15mm copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 8 litres per minute at 0.1 bar




1 : 5 : 3 : 5

Sandringham 21

two hole sink mixer

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with 5 facet handles.



ARMITAGE SHANKS

Domestic and commercial use
Screw down mechanism

Illustrated

B9873 Sandringham sink filler 2 taphole dual flow, swivel spout

Material

Chrome Plated Metal

Weight

2.7kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies high or low pressure. Inlets with flexible hoses and connections for 15mm copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Water saving can be achieved by use of a flow regulators such as L6935NU to deliver maximum of 4 Litres per minute. Unregulated flow rate 20 litres per minute at 0.1 bar.

Sandringham 21

sink pillar taps

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with crosshead handles one of 3 handle designs.



ARMITAGE SHANKS

Domestic and commercial use
Screw down mechanism
One of three handle designs

Illustrated

B9879 Sandringham 21 sink pillar taps high neck, crosshead handles

Material

Chrome Plated Metal

Weight

1.3kg

Colour/Finish

Chromium plated (AA)

Special notes


Suitable for balanced/unbalanced supplies. Inlets screwed 1/2in BSP male, coned for copper. Pillar taps come supplied with brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 15 litres per minute at 0.1 bar.



Sandringham 21

sink mixer

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Screw-down valve with crosshead handles.

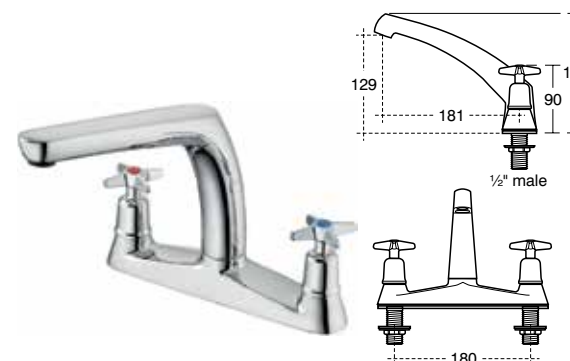

ARMITAGE SHANKS

Domestic and commercial use
Screw down mechanism

Illustrated

B9880 Sandringham sink filler 2 taphole dual flow swivel spout, crosshead handles

Material

Chrome Plated Metal

Weight

2.7kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies high or low pressure. Inlets with flexible hoses and connections for 15mm copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 20 litres per minute at 0.1 bar.



Sandringham 21

sink pillar taps


New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Ceramic disc with lever handles.



Sandringham 21

sink mixer

New Sandringham 21 range, based on proven body designs optimised for flow performance to meet BS EN 200. Ceramic disc with lever handles

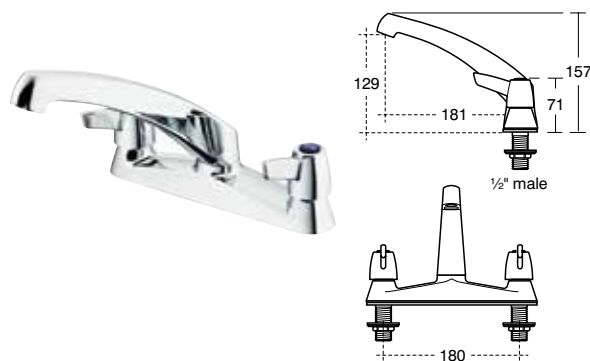

ARMITAGE SHANKS

Domestic and commercial use

'Drip free' Ceramic disc

One of three handle designs

Illustrated

B9885 Sandringham 21 sink pillar taps high neck, lever handles

Material

Chrome Plated Metal

Weight

1.4kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies. Inlets screwed 1/2in BSP male, coned for copper. Pillar taps come supplied with brass back nuts. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 7.5 litres per minute at 0.1 bar.



ARMITAGE SHANKS

Domestic and commercial use

"No drip" Ceramic disc

Illustrated

B9886 Sandringham sink filler 2 taphole dual flow swivel spout, lever handles

Material

Chrome Plated Metal

Weight

2.7kg

Colour/Finish

Chromium plated (AA)

Special notes

Suitable for balanced/unbalanced supplies high or low pressure. Inlets with flexible hoses and connections for 15mm copper tails. Consideration should be given to safe hot water delivery and the use of an appropriate temperature reduction device. Unregulated flow rate 14 litres per minute at 0.1 bar.



1 : 5 : 3 : 8

Sandringham SL

sink mixer

A single lever operated mixer fitting providing economic cost solutions combined with water saving. The mixer features a CLICK cartridge which offers a limit on water flow by 50%.



ARMITAGE SHANKS

Sink monoblock mixer

Swivel spout

5 litre per minute Eco flow regulator

Water saving

WRAS approved

Illustrated

B4449 Sandringham sink mixer 1 hole, lever operated with single flow swivel spout

Material

Chrome Plated Metal

Weight


2.1kg

Colour/Finish

Chromium plated (AA)

Special notes

The CLICK cartridge offers water saving by encouraging the user to only lift open the handle before coming against slight resistance. This resistance informs the user that the fitting is delivering only 50% of its maximum flow potential. Lifting the handle beyond the resistance enables the fitting to deliver at maximum level. The cartridge also features a limiting device that can restrict movement of the handle on the hot side, adding a major safety feature. Inlets with 10mm plain copper tails. Flow rate with fitted regulator 5 litres per minute. Unregulated flow rate 5.8 litres per minute at 0.2 bar

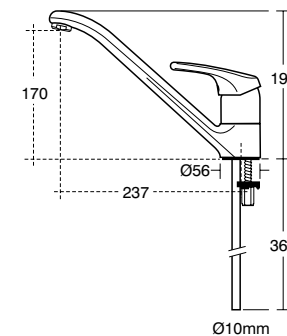

1 : 5 : 3 : 9

